



**FULLY EQUIPPED**  
innovative accessory solutions



## WARN WINCH 4700 DC

The 4700 DC boasts a ready-for-anything attitude. Bring on the big loads, the big jobs no one wants to tackle. Couple 60' of wire rope with the powerful three-stage planetary gear train and you've got a peerless load-mover. Pulls up to 4,700 lbs, no problem.


### 4700 DC SPECS

**Part Number:** 94700  
**Capacity:** 4,700 lbs. (2130 kgs) single line  
**Switch Type:** Remote With 12' (3.7 m) Lead  
**Motor:** Permanent Magnet  
**HP:** 1.9 HP 3.0" Diameter  
**Power:** 12V DC  
**Geartrain:** 3-stage planetary  
**Clutch:** Lever - Multi-Directional  
**Brake:** Dynamic and Mechanical Braking  
**Wire Rope:** 1/4" X 60' (18.3 m)  
**Fairlead:** Hawse  
**Electrical Leads:** 2 - 6' (1.8m) X 6 gauge cable  
**Weight:** 42 lbs. (19.1 kg)  
**Warranty:** Limited One Year  
**Replacement Wire Rope:** PN 71297

### 12V DC PERFORMANCE SPECS (first layer of drum)

Line Pull Lbs.(Kgs.)	Line Speed FT./min(M/min.)	Motor Current	Pull by layer layer/Lbs(Kgs.)
0(0)	17.9(5.5)	47 Amps	1/4700(2130)
1000(453.6)	12.8(3.9)	82 Amps	2/3980(1800)
2000(907.2)	10.8(3.3)	150 Amps	3/3450(1560)
3000(1360.8)	8.1(2.5)	212 Amps	4/3041(1380)
4000(1814.4)	5.8(1.8)	277 Amps	5/2720(1230)
4700(2132)	4.3(1.3)	322 Amps	

Above performance specs are based on first layer of drum

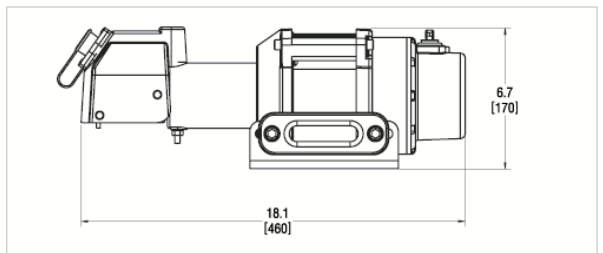

**Winch Dimensions:** 12" L. x 19.5" W. x 8.0" H. (.30m L. x .49m W. x .20m H.)

TO PURCHASE THIS PRODUCT, CONTACT YOUR NEAREST FULLY EQUIPPED STORE  
 0800 111 000    [WWW.FULLY EQUIPPED.CO.NZ](http://WWW.FULLY EQUIPPED.CO.NZ)

