

**FULLY EQUIPPED**  
innovative accessory solutions



## WARN WINCH XD9000

A long-time best seller, the XD9000 is fast and reliable in real trail conditions. The compact body and separate control pack lets it work effectively in very tight spaces. It uses the 4.6-hp Series Wound motor and three-stage planetary gearing offered on most of our winches, so torque and line speed are outstanding.



### XD9000 SPECS

<b>Rated Line Pull:</b> 9,000 lbs. (4080 kgs) single-line
<b>Intended Use/Application:</b> Vehicle Recovery / For Trucks and SUVs
<b>Motor:</b> 12V 4.6 hp, 24V 2.5 hp Series Wound
<b>Duty Cycle Rating:</b> BEST ← → GOOD
<b>Remote Control:</b> Remote, 12' (3.7m) lead
<b>Geartrain:</b> 3-Stage Planetary
<b>Gear Ratio:</b> 156:1
<b>Lubrication:</b> Aeroshell #17
<b>Clutch (freespooling):</b> Sliding Ring Gear
<b>Brake:</b> Automatic Direct Drive Cone
<b>Drum Diameter/Length:</b> 2.5"/9.0" (6.4cm/23cm)
<b>Weight:</b> 78 lbs. (35 kgs.)
<b>Wire Rope:</b> 100', 5/16" diameter (30m, 8mm diameter)
<b>Fairlead:</b> Roller
<b>Recommended Battery:</b> 650 CCA minimum for winching
<b>Battery Leads:</b> 2 gauge, 72" (1.83m)
<b>Finish:</b> Argent Powder Coat
<b>Nuts/Bolts:</b> PN 39625
<b>CE Winches:</b> CE products are designed to meet European Standards. CE winches include CE labels, manuals, roller fairlead, safety hook and thimble.


### 12V DC PERFORMANCE SPECS

Line Pull Lbs.(Kgs.)	Line Speed FT./min(M/min.)	Motor Current	Pull by layer layer/Lbs.(Kgs.)
0	38(11.6)	70 amps	1/9000(4082)
2000(910)	14.4(4.39)	180 amps	2/8190(3715)
4000(1810)	11(3.35)	255 amps	3/7500(3402)
6000(2720)	8.67(2.64)	330 amps	4/7010(3180)
8000(3630)	6.88(2.10)	415 amps	
9000(4080)	6.38(1.94)	460 amps	

### 24V DC PERFORMANCE SPECS

Line Pull Lbs.(Kgs.)	Line Speed FT./min(M/min.)	Motor Current	Pull by layer layer/Lbs.(Kgs.)
0	22.5(6.86)	46 amps	1/9000(4082)
2000(910)	14.5(4.42)	93 amps	2/8190(3715)
4000(1810)	11(3.35)	131 amps	3/7500(3402)
6000(2720)	9.1(2.77)	169 amps	4/7010(3180)
8000(3630)	7.9(2.41)	207 amps	5/6570(2980)
9000(4080)	7.4(2.26)	226 amps	

Above performance specs are based on first layer of drum

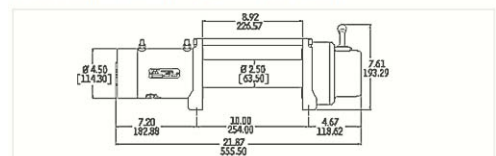

**Winch Dimensions:** 21.8" L. x 6.3" D. x 7.6" H.  
(555mm L. x 160mm D. x 193mm H.)  
**Mounting Bolt Pattern:** 10.0" x 4.5" (254mm x 114.3mm)

TO PURCHASE THIS PRODUCT, CONTACT YOUR NEAREST FULLY EQUIPPED STORE  
0800 111 000    www.FULLY EQUIPPED.CO.NZ

