



## TABOR 10K

### SPECIFICATIONS

**Steel (ST):** W08-01-96995

**Synthetic (SY):** W08-01-97000

**Rated Line Pull:** 4536 kg single-line

**Motor:** 12V DC Series Wound

**Electrical Controls:** Solenoid

**Remote Control:** Remote switch, 3.7m lead

**Geartrain:** 3-Stage Planetary

**Gear Ratio:** 261:1

**Clutch (freespooling):** Sliding Ring Gear

**Brake:** Automatic Direct Drive Cone

**Drum diameter/Length:** 64mm/230mm

**Rope:** 24.3m/9.5mm (ST),

27.4m/9.5mm (SY)


**Fairlead:** Roller (ST), Hawse (SY)

**Recommended Battery:** 650 CCA minimum for winching

**Battery leads:** 2 gauge, 1.83m

**Finish:** Powder coat

Line Pull	Line Speed	Motor	Pull by Layer
kg	m/min	Current	Layer/Kg
0	7.6	66 amps	1/4536
910	3.9	160 amps	2/3597
1810	2.9	247 amps	3/2981
2720	2.1	332 amps	4/2545
3630	1.5	417 amps	5/2220
4536	0.7	502 amps	

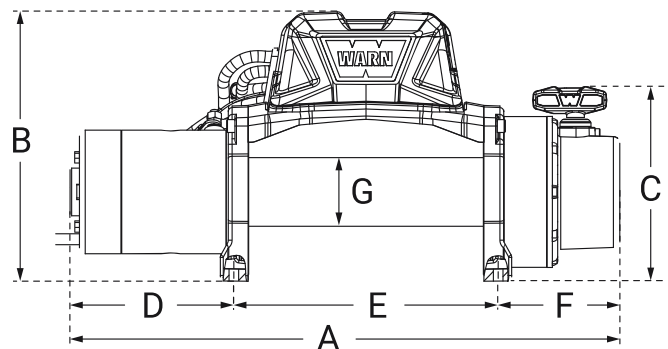

A. 528.2mm C. 160.0mm E. 254.0mm G. 63.5mm

B. 249.1mm D. 157.4mm F. 116.8mm

Mounting bolt pattern: 254.0mm x 114.3mm



Use More Of Your Vehicle  
[www.fullyequipped.co.nz](http://www.fullyequipped.co.nz)

